


## DC Brushless Water Pump


Miniaturowa bezszczotkowa pompa obiegowa FOTTON FT-A32 12V DC Z


Product F	Paramete	er									
Character		FOTTON FT-A32 12V DC Z									
Max worki		12VDC									
Rated work	e	12VDC									
Rated		0.8W									
Hma (Max static	1)	0.75 meters									
Qmax (Max static flow rate)			1 L/min								
Lifespan			Continuous operation under normal working surrounding 20000H								
Working Environment			PH value: PH5-10(weak acid and weak base), workable in water. Submersible.								
Max noise			Under normal working condition,(1meter over the test instrument) 35dB								
Max working temperature		re U	Under room temperature surroundings, fluid medium temperature70								
Application		Gree	Green wall decoration, smart gaden herbs, plant&flowers watering, soilless culture humidifier, foot massage, small fountain, aquarium, dishwasher, etc.								
Col		Black (Can be customized according to customer`s requirement)									
Outlet direction			Can be adjustable at any angle								
Dimension				Inlet				Outlet		Remarks	
Length mm	Width mm	Height mm	- IP grade	OD m	m	ID	mm	OD mm	ID mm		
33.0	37.0	23.0	IP68	5.	0			6.0			




## **Outside View**







## **Curve Graph**

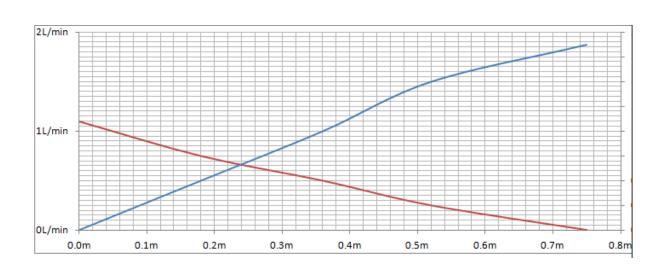

## Photo

