


Pompa - fontanna FOTTON FT 11-2 12V DC Z

Product Para	meter								
Model Character			FOTTON FT-11-2 12V DC Z zatapilana						
Max working voltage			12VDC						
Rated working voltage			12VDC						
Rated power			13W						
Hmax Max static water head			4 meters						
Qmax Max static flow rate			6 L/min						
Lifespan			Continuous operation under normal working surroun d g 20000H						
Working Environment		PH va	PH value: PH5-10(weak acid and weak base), workable in water, submersible pump.						
Max noise			Under normal working condition,(1meter over the test instrument) 35dB						
Max working temperature		e	Under room temperature surroundings, fluid mediumetmperature 70						
Application		bath r water	Solar fountain, aquarium, water tank, fish pond, medical treatment equipment, mobile bath machine, air conditioner and fans, foot massage, hydroponics, plant & flowers watering, solar water circulation system, solar water heater water booster, water circulation of home appliance, crafts, etc.						
Color			Black (Can be customized according to customer's requirement)						
Outlet direction			Can be adjustable at any angle						
Dir			Inlet		Outlet		Remarks		
Length mm	Width mm	Height mm	IP grade	OD mm	ID mm	OD mm	ID mm	Outlet has footers and	
39.5	39.5	98.5	IP68	13.5	10.0	17.0	10.0	assumed strainer	



Outside View

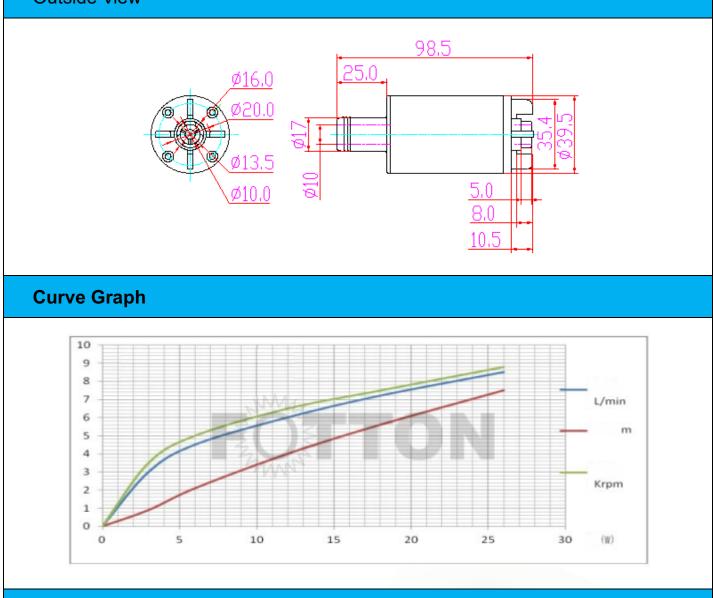

Photo



www.fotton.pl